

Yi-Card Enterprise Co., Ltd.





ROCAIR

Torque Wrenches

Torque Wrenches (Preset Type)

Features:

- Time & Labor Saving.
- For Industrial Applications.
- Easy Operation Design.
- Direction & Accuracy: C.W. $\pm 4\%$.
- Wide Torque range Choice: 18Nm - 65Nm.

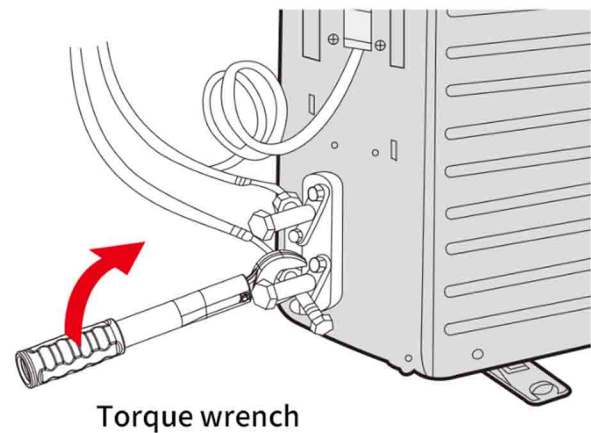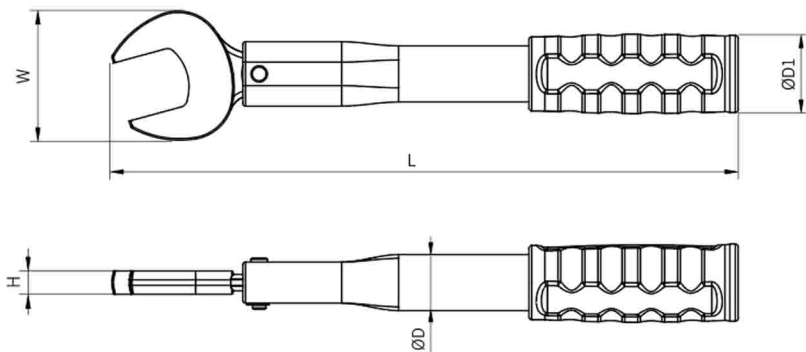

Torque wrench

RR-TW17/22/26/29 Torque Wrenches





Specifications

Model/Item	DESCRIPTION	Dimensions (cm)
RR-TW17 Torque Wrench	17mm Driver ; Torque Range: 18Nm	W: 3.80 ; H: 0.75 ; L: 22.0 ; D: 2.01 ; D1: 2.99
RR-TW22 Torque Wrench	22mm Driver ; Torque Range: 42Nm	W: 4.72 ; H: 0.86 ; L: 23.0 ; D: 2.01 ; D1: 2.99
RR-TW26 Torque Wrench	26mm Driver ; Torque Range: 55Nm	W: 5.49 ; H: 0.99 ; L: 28.5 ; D: 2.01 ; D1: 2.99
RR-TW29 Torque Wrench	29mm Driver ; Torque Range: 65Nm	W: 6.19 ; H: 0.99 ; L: 29.0 ; D: 2.01 ; D1: 2.99

Multi-Preset Type Torque Wrench Tool Kits

Features:

- Time & Labor Saving.
- For HVAC&R Installation and Service.
- Easy Operation Design.
- Direction & Accuracy: C.W. $\pm 4\%$.
- Torque range (4 Colors):
18Nm (Yellow)
42Nm (Black)
55Nm (Red)
65Nm (White)-(RR-65N2)
Or
75Nm (White)-(RR-75N2)

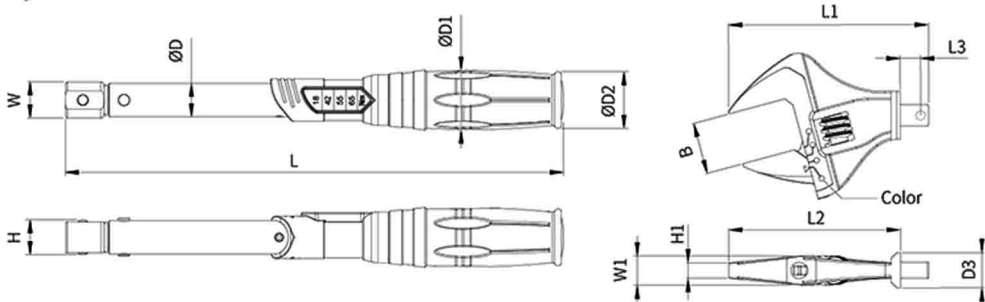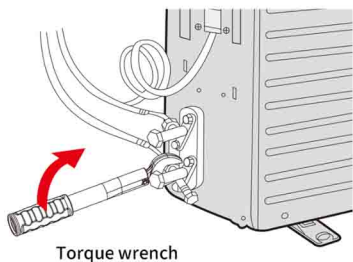

RR-65/75N2 Torque Wrench Tool Kits:



RR-65N2

9X12




Specifications

Model/Item	DESCRIPTION	Size	Dimensions (cm)
RR-65N2 Torque Wrench Tool Kit	Connection: 9x12; Torque Range: 18, 42, 55 & 65Nm	B: (Yellow 17mm; Black 22mm; Red 26mm; White 29mm)	W:2.2; H: 1.9; L: 30.56; D: 2.05; D1: 3.6; D2:3.46
RR-75N2 Torque Wrench Tool Kit	Connection: 9x12; Torque Range: 18, 42, 55 & 75Nm	B: (Yellow 17mm; Black 22mm; Red 26mm; White 29mm)	W:2.2; H: 1.9; L: 30.56; D: 2.05; D1: 3.6; D2:3.46

Multi-Preset Type Torque Wrench Tool Kits

Features:

- Time & Labor Saving.
- For HVAC&R Installation and Service.
- Easy Operation Design.
- Direction & Accuracy: C.W. $\pm 4\%$.
- Torque range (4 Colors):
18Nm (Yellow)
42Nm (Black)
55Nm (Red)
65Nm (White)-(RR-65NS2)
Or
75Nm (White)-(RR-75NS2)

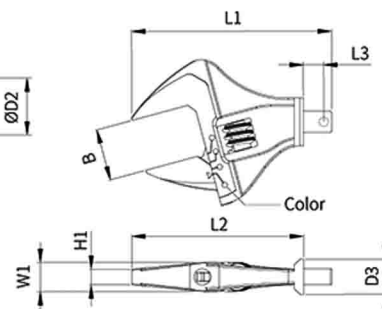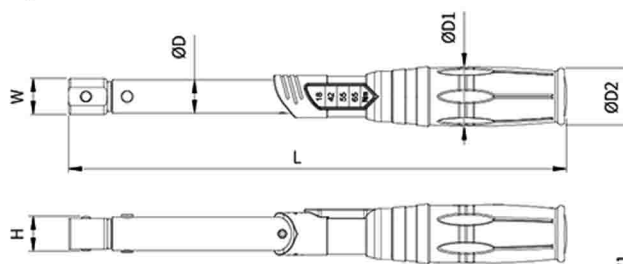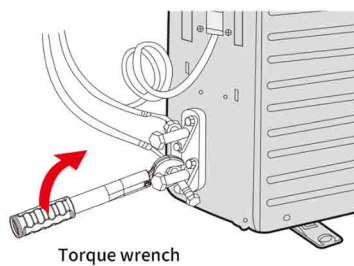

RR-65/75NS2 Torque Wrench Tool Kits:



RR-65NS2

14X18


Specifications

Model/Item	DESCRIPTION	Size	Dimensions (cm)
RR-65NS2 Torque Wrench Tool Kit	Connection: 14x18; Torque Range: 18, 42, 55 & 65Nm	B: (Yellow 17mm; Black 22mm; Red 26mm; White 29mm)	W:3.2; H: 2.5; L: 31.46; D: 2.05; D1: 3.6; D2:3.46
RR-75NS2 Torque Wrench Tool Kit	Connection: 14x18; Torque Range: 18, 42, 55 & 75Nm	B: (Yellow 17mm; Black 22mm; Red 26mm; White 29mm)	W:3.2; H: 2.5; L: 31.46; D: 2.05; D1: 3.6; D2:3.46

Multi-Preset Type Torque Wrench Tool Kits

Features:

- Time & Labor Saving.
- For HVAC&R Installation and Service.
- Easy Operation Design.
- Direction & Accuracy: C.W. $\pm 4\%$.
- Torque range (4 Colors):
18Nm (Yellow)
42Nm (Black)
55Nm (Red)
65Nm (White)-(RR-65XN2)
Or
75Nm (White)-(RR-75XN2)

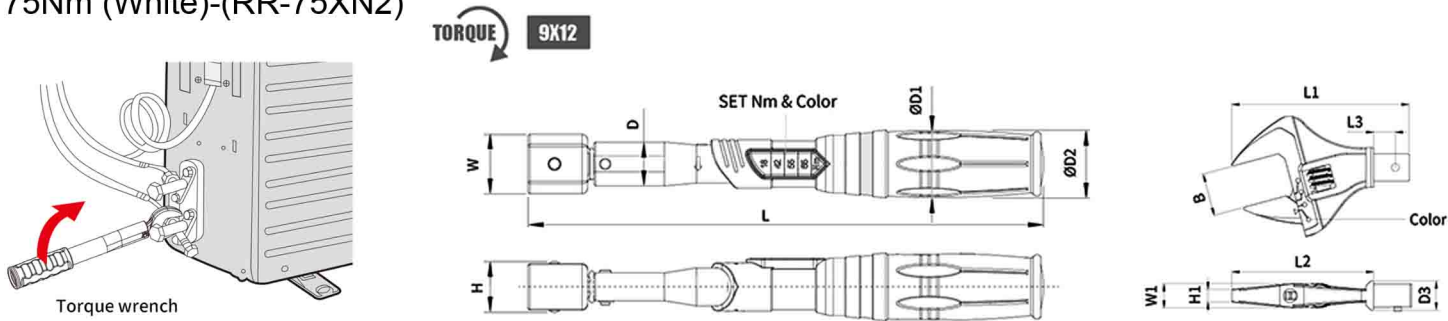

RR-65/75XN2 Torque Wrench Tool Kits:



RR-75XN2


Specifications

Model/Item	DESCRIPTION	Size	Dimensions (cm)
RR-65XN2 Torque Wrench Tool Kit	Connection: 9x12; Torque Range: 18, 42, 55 & 65Nm	B: (Yellow 17mm; Black 22mm; Red 26mm; White 29mm)	W:2.4; H: 1.9; L: 26.85; D: 2.36; D1: 3.6; D2:3.46
RR-75XN2 Torque Wrench Tool Kit	Connection: 9x12; Torque Range: 18, 42, 55 & 75Nm	B: (Yellow 17mm; Black 22mm; Red 26mm; White 29mm)	W:2.4; H: 1.9; L: 26.85; D: 2.36; D1: 3.6; D2:3.46

Multi-Preset Type Torque Wrench Tool Kits

Features:

- Time & Labor Saving.
- For HVAC&R Installation and Service.
- Easy Operation Design.
- Direction & Accuracy: C.W. $\pm 4\%$.
- Torque range (4 Colors):
18Nm (Yellow)
42Nm (Black)
55Nm (Red)
65Nm (White)-(RR-65XNS2)
Or
75Nm (White)-(RR-75XNS2)

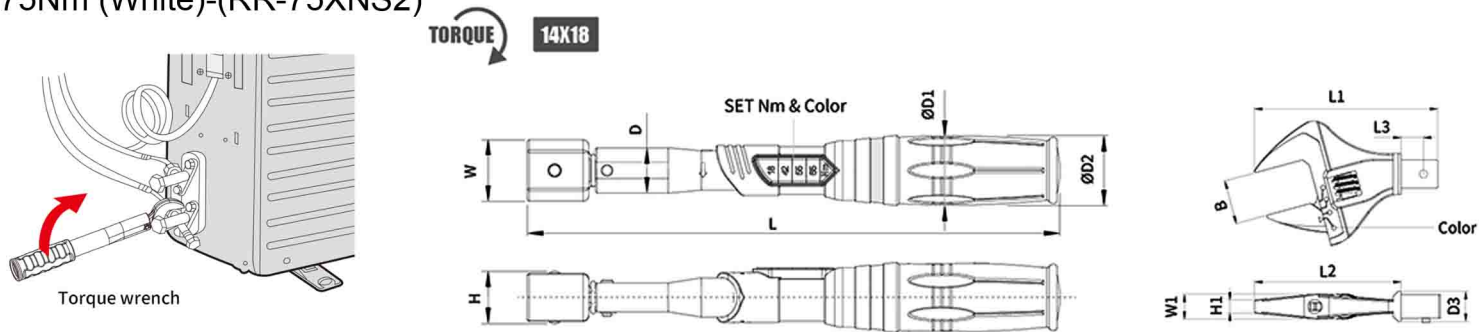

RR-65/75XNS2 Torque Wrench Tool Kits:




Specifications

Model/Item	DESCRIPTION	Size	Dimensions (cm)
RR-65XNS2 Torque Wrench Tool Kit	Connection: 14x18; Torque Range: 18, 42, 55 & 65Nm	B: (Yellow 17mm; Black 22mm; Red 26mm; White 29mm)	W:3.2; H: 2.5; L: 27.75; D: 2.36; D1: 3.6; D2:3.46
RR-75XNS2 Torque Wrench Tool Kit	Connection: 14x18; Torque Range: 18, 42, 55 & 75Nm	B: (Yellow 17mm; Black 22mm; Red 26mm; White 29mm)	W:3.2; H: 2.5; L: 27.75; D: 2.36; D1: 3.6; D2:3.46

Interchangeable Head Torque Wrenches

Features:

- Interchangeable Heads.
- For HVAC&R Installation and Service.
- Easy Operation Design.
- Direction & Accuracy: C.W. $\pm 4\%$.
- Torque range (4 Colors):
18Nm (Yellow)
42Nm (Black)
55Nm (Red)
65Nm (White)

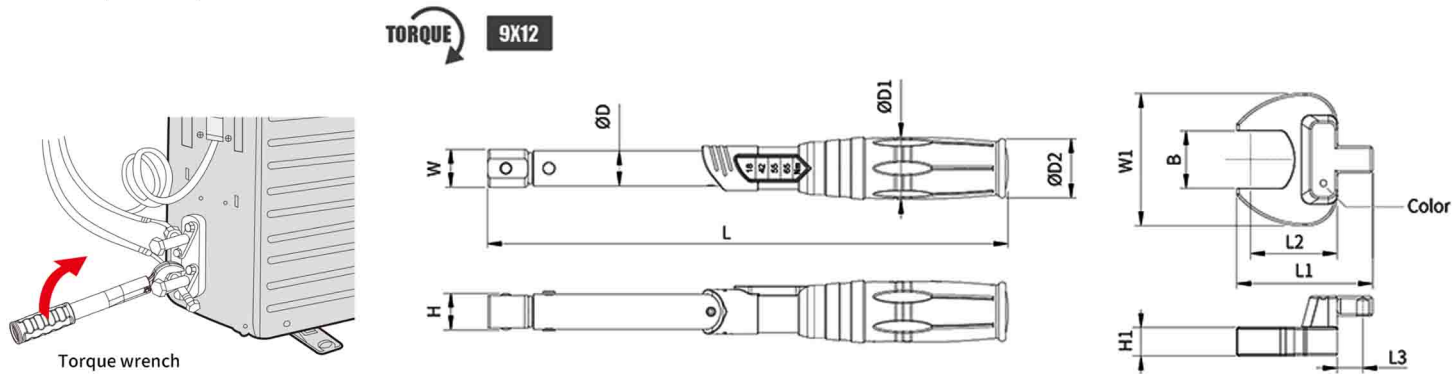

RR-65N5 Torque Wrench Tool Kit:




Specifications

Model/Item	DESCRIPTION	Size	Dimensions (cm)
RR-65N5 Torque Wrench Tool Kit	Interchangeable Head Connection: 9x12; Torque Range: 18, 42, 55 & 65Nm	B: (Yellow 17mm; Black 22mm; Red 26mm; White 29mm)	W:2.2; H: 1.9; L: 30.56; D: 2.05; D1: 3.6; D2:3.46

Interchangeable Head Torque Wrenches

Features:

- Interchangeable Heads.
- For HVAC&R Installation and Service.
- Easy Operation Design.
- Direction & Accuracy: C.W. $\pm 4\%$.
- Torque range (4 Colors):
18Nm (Yellow)
42Nm (Black)
55Nm (Red)
65Nm (White)

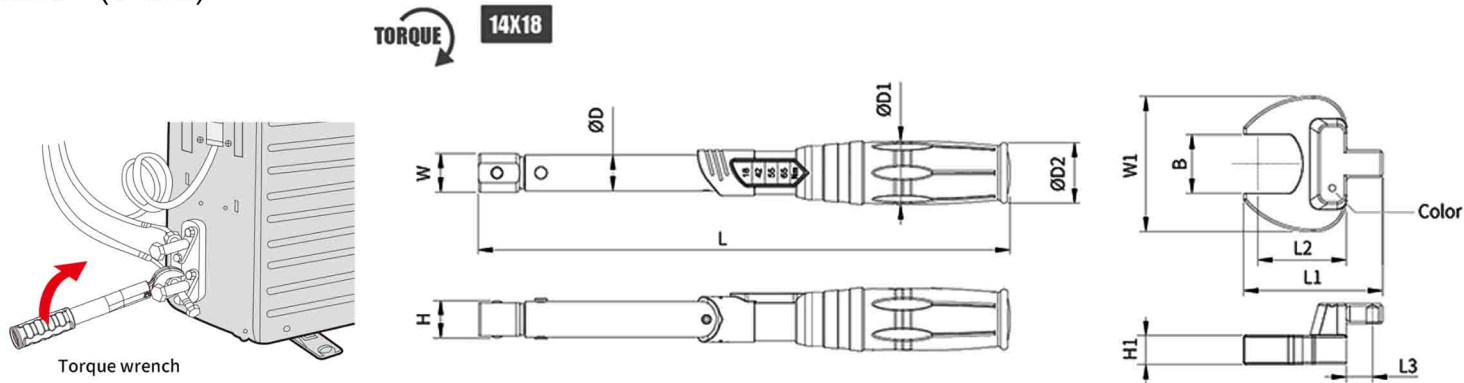

RR-65NS5 Torque Wrench Tool Kit:





Specifications

Model/Item	DESCRIPTION	Size	Dimensions (cm)
RR-65NS5 Torque Wrench Tool Kit	Interchangeable Head Connection: 14x18; Torque Range: 18, 42, 55 & 65Nm	B: (Yellow 17mm; Black 22mm; Red 26mm; White 29mm)	W:3.2; H: 2.5; L: 31.46; D: 2.05; D1: 3.6; D2:3.46

Interchangeable Head Torque Wrenches

Features:

- Interchangeable Heads.
- For HVAC&R Installation and Service.
- Easy Operation Design.
- Direction & Accuracy: C.W. $\pm 4\%$.
- Torque range (4 Colors):
18Nm (Yellow)
42Nm (Black)
55Nm (Red)
65Nm (White)-(RR-65XN5)
Or
75Nm (White)-(RR-75XN5)

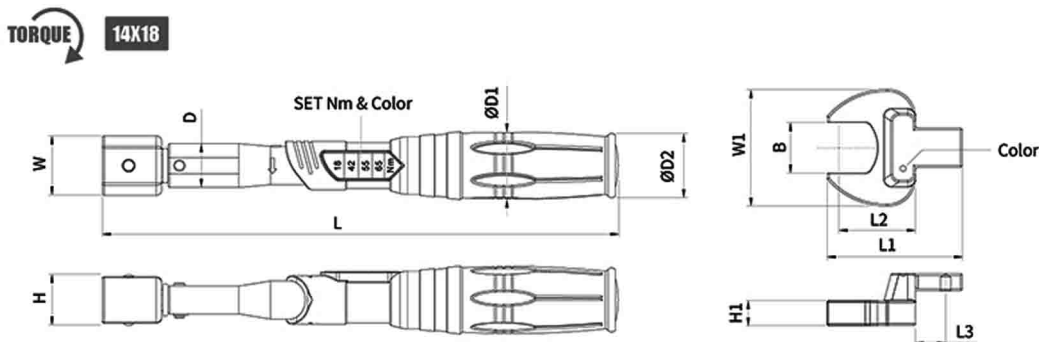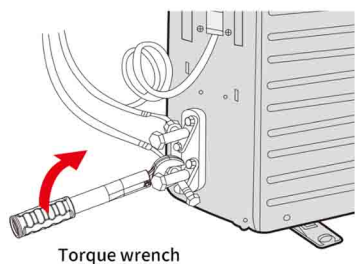

RR-65/75XN5 Torque Wrench Tool Kits:



RR-75XN5

9X12


Specifications

Model/ Item	DESCRIPTION	Size	Dimensions (cm)
RR-65XN5	Interchangeable Head Connection: 9x12; Torque Range: 18, 42, 55 & 65Nm	B: (Yellow 17mm; Black 22mm; Red 26mm; White 29mm)	W: 2.4; H: 1.9; L: 26.85; D: 2.36; D1: 3.6; D2:3.6
RR-75XN5	Interchangeable Head Connection: 9x12; Torque Range: 18, 42, 55 & 75Nm	B: (Yellow 17mm; Black 22mm; Red 26mm; White 29mm)	W: 2.4; H: 1.9; L: 26.85; D: 2.36; D1: 3.6; D2:3.6

Interchangeable Head Torque Wrenches

Features:

- Interchangeable Heads.
- For HVAC&R Installation and Service.
- Easy Operation Design.
- Direction & Accuracy: C.W. $\pm 4\%$.
- Torque range (4 Colors):
18Nm (Yellow)
42Nm (Black)
55Nm (Red)
65Nm (White)-(RR-65XNS5)
Or
75Nm (White)-(RR-75XNS5)

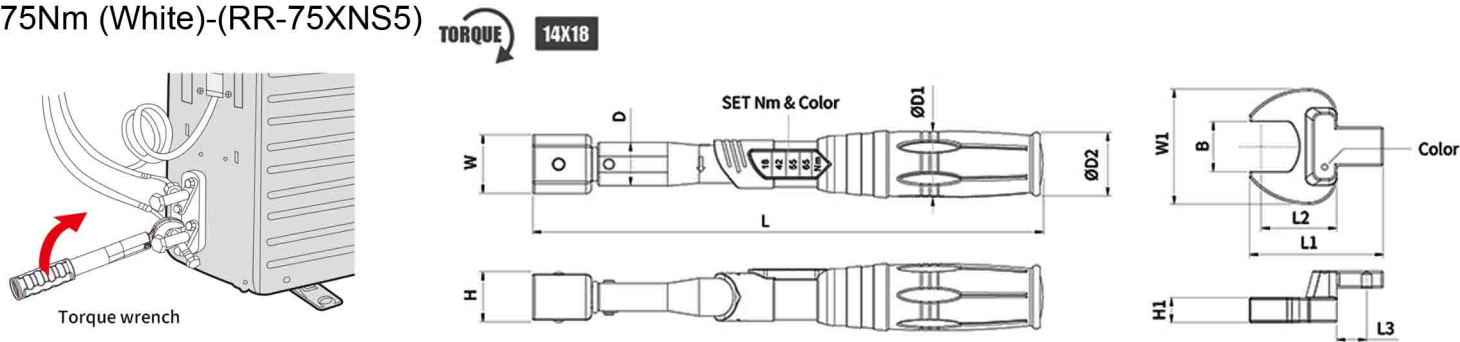

RR-65/75XNS5 Torque Wrench Tool Kits:



RR-75XNS5

14X18

Specifications

Model/Item	DESCRIPTION	Size	Dimensions (cm)
RR-65XNS5	Interchangeable Head Connection: 14x18; Torque Range: 18, 42, 55 & 65Nm	B: (Yellow 17mm; Black 22mm; Red 26mm; White 29mm)	W:3.2; H: 2.5; L: 27.75; D: 2.36; D1: 3.6; D2:3.46
RR-75XNS5	Interchangeable Head Connection: 14x18; Torque Range: 18, 42, 55 & 75Nm	B: (Yellow 17mm; Black 22mm; Red 26mm; White 29mm)	W:3.2; H: 2.5; L: 27.75; D: 2.36; D1: 3.6; D2:3.46



Insulated Ratchet Wrench Handle

Features:

- For 3/8" Insulated Sockets & Extensions.
- Anti Electric-Shock.
- Insulation Meets All Requirements of The VDE Standard Relevant International Standards. (IEC 60900-2012)

Quick release button design.
Push the button to release socket.

PUSH

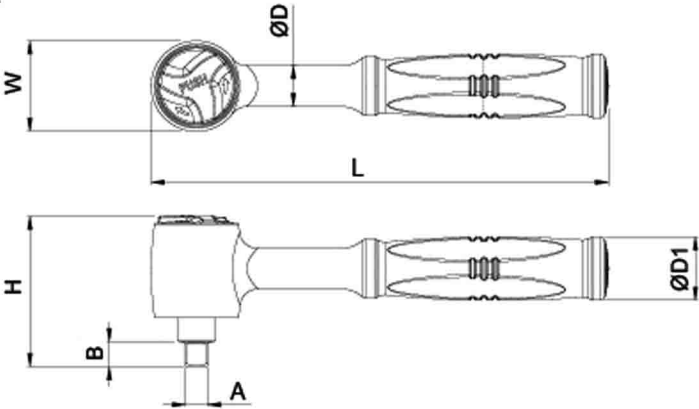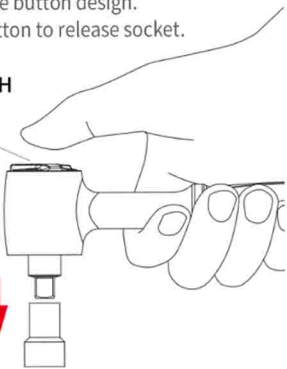

RR-IR38 Insulated Ratchet Wrench Handle:



Specifications



Model/Item	DESCRIPTION	Size	DIMENSIONS		
			D1 (mm)	L (mm)	H (mm) (mm)
RR-IR38	3/8" Ratchet Wrench Handle	W: 36mm ; B: 11mm ; D: 18mm	28	198	64mm

Insulated Torque Wrench Handle(Slip Type)

Features:

- For 3/8" Insulated Sockets & Extensions.
- Anti Electric-Shock.
- Insulation Meets All Requirements of The VDE Standard Relevant International Standards. (IEC 60900)
- Direction & Accuracy : C.W. $\pm 6\%$ / C.C.W. $\pm 6\%$

Quick release button design.
Push the button to release socket.

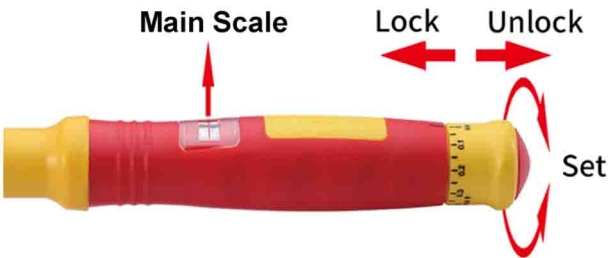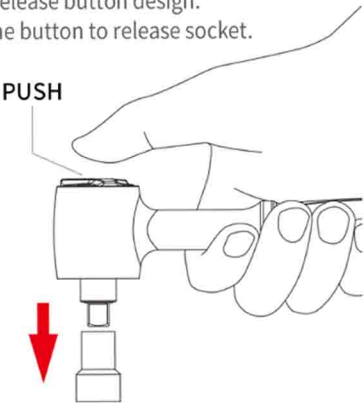


RR-INS01 Insulated Torque Wrench Handle:



Specifications


Model/ Item	DESCRIPTION	Size	Dimensions (cm)
RR-INS01	5-25Nm Insulated Torque Wrench Handle	3/8" ; Scale: 0.05Nm	W: 4.47 ; H: 6.57 ; B: 1.16 ; L: 26.93 ; D: 2.56

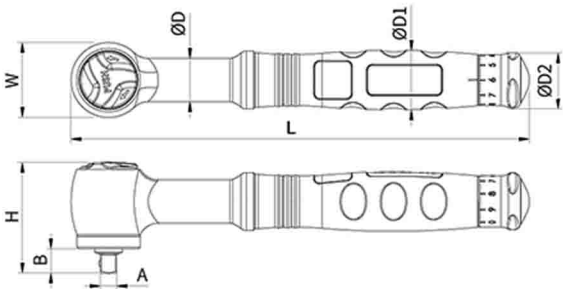

Insulated Torque Wrench Handle(Click Type)

Features:

- Anti Electric-Shock.
- For 3/8" Insulated Sockets & Extensions.(RR-INS02-30/60/100)
- For 1/2" Insulated Sockets & Extensions. (RR-INS02-200/300)
- Insulation Meets All Requirements of The VDE Standard Relevant International Standards. (IEC 60900)
- Direction & Accuracy : C.W. $\pm 4\%$

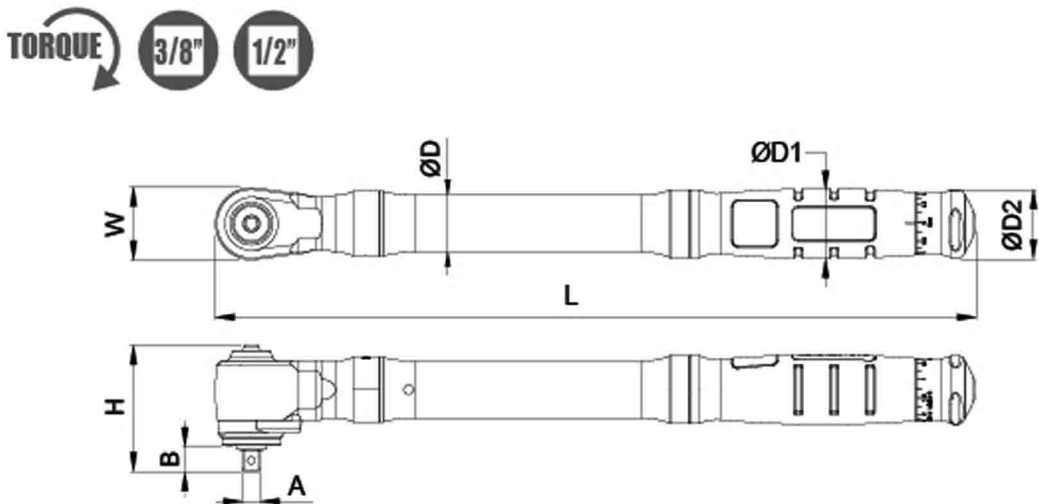

RR-INS02 Insulated Torque Wrench Handle:



Specifications



Model/Item	DESCRIPTION	Size	Dimensions (cm)
RR-INS02-30	6-30Nm Insulated Torque Wrench Handle	3/8" ; Scale: 0.1Nm	W: 3.82 ; H: 6.70 ; B: 1.19 ; L: 29.94 ; D: 3.00
RR-INS02-60	10-60Nm Insulated Torque Wrench Handle	3/8" ; Scale: 0.25Nm	W: 3.82 ; H: 6.70 ; B: 1.19 ; L: 35.06 ; D: 3.00
RR-INS02-100	20-100Nm Insulated Torque Wrench Handle	3/8" ; Scale: 0.25Nm	W: 3.82 ; H: 6.70 ; B: 1.19 ; L: 40.11 ; D: 3.00
RR-INS02-200	40-200Nm Insulated Torque Wrench Handle	1/2" ; Scale: 1Nm	W: 5.00 ; H: 8.21 ; B: 1.36 ; L: 44.70 ; D: 3.20
RR-INS02-300	60-300Nm Insulated Torque Wrench Handle	1/2" ; Scale: 2Nm	W: 5.00 ; H: 8.21 ; B: 1.36 ; L: 57.60 ; D: 3.20

Insulated Torque Wrench Handle(Click Type)

Features:

- Anti Electric-Shock.
- For 1/4" Insulated Sockets & Extensions. (RR-INS03-10)
- For 3/8" Insulated Sockets & Extensions. (RR-INS03-30)
- Insulation Meets All Requirements of The VDE Standard Relevant International Standards. (IEC 60900)
- Direction & Accuracy : C.W. $\pm 4\%$

Quick release button design.
Push the button to release socket.

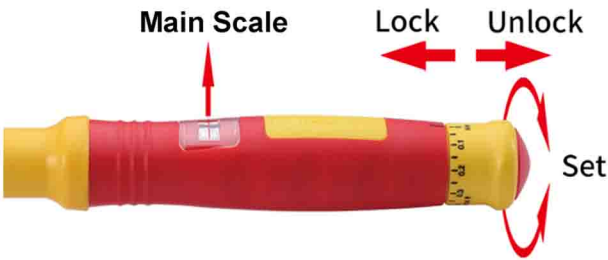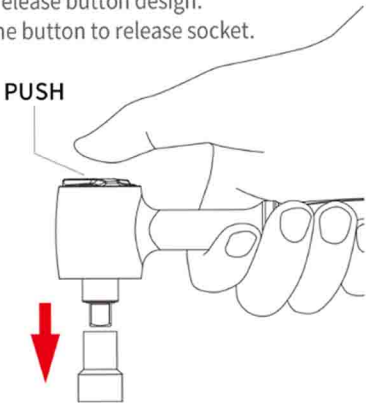


RR-INS03 Insulated Torque Wrench Handle:

Specifications




Model/Item	DESCRIPTION	Size	Dimensions (cm)
RR-INS03-10	2-10Nm Insulated Torque Wrench Handle	1/4" ; Scale: 0.05Nm	W: 4.00 ; H: 6.03 ; B: 0.85 ; L: 21.19 ; D: 2.40
RR-INS03-30	6-30Nm Insulated Torque Wrench Handle	3/8" ; Scale: 0.1Nm	W: 4.00 ; H: 6.40 ; B: 1.15 ; L: 21.19 ; D: 2.40

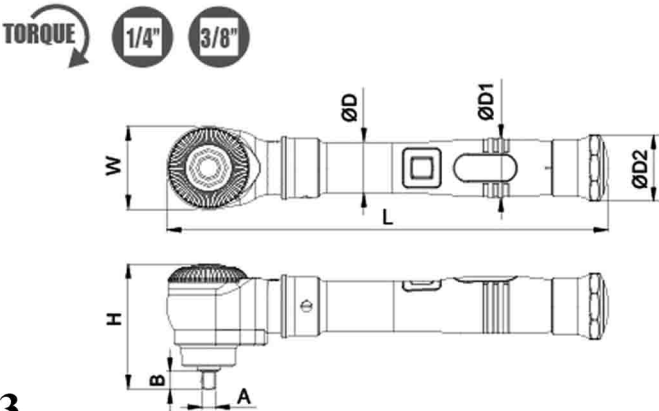

Insulated Sockets & Extensions



3/8"

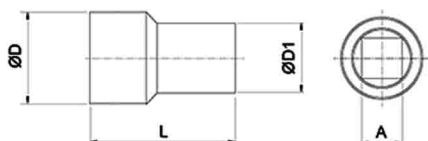


RR-IS38 Insulated Sockets

- 3/8" Insulated Sockets.
- Anti Electric-Shock.
- Insulation Meets All Requirements of The VDE Standard Relevant International Standards. (IEC 60900-2012)
- Socket Sizes (Hex, mm): 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18 & 19.

RR-IE38 Insulated Extensions

- Size: 3/8"
- Anti Electric-Shock.
- Insulation Meets All Requirements of The VDE Standard Relevant International Standards. (IEC 60900-2012)

3/8"

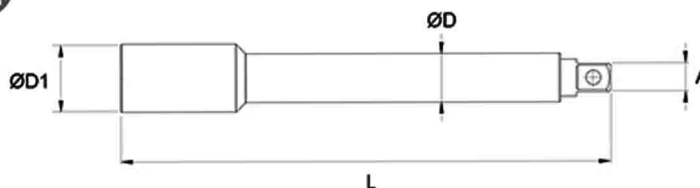

Specifications

Model/Item	DESCRIPTION	Length (Inch)	Dimensions (cm)
RR-IE38-06	3/8" Insulated Extension	6.5	D: 1.63 ; D1: 2.22
RR-IE38-10	3/8" Insulated Extension	10.5	D: 1.63 ; D1: 2.22

ROCAIR

Yi-Card Enterprise Co., Ltd.

www.rocair.com.tw

162 Sec. 1, Tai-Yuan Rd., Taichung, 403, Taiwan

E-mail: yicard@ms7.hinet.net

Tel: 886-4-2-314-0193, 4-2-314-1522

Fax: 886-4-2-314-5253, 4-2-311-4648